A dynamic water splash background with a central circular highlight. The water is captured in mid-air, creating a sense of movement and freshness. The splash is composed of various droplets and larger water masses, with a prominent circular highlight in the center of the page.

POD[®]

1P-68 PRE FILLED GEL CONNECTORS



P-4427
Page-1



P-8040/1
Page-4



P-10544
Page-8



P-5537
Page-1



P-10029
Page-5



P-10544/2
Page-8



P-7023
Page-2



P-10029/3
Page-5



P-12040/2
Page-9



P-3737
Page-2



P-8368/3
Page-6



P-12040/3
Page-9



P-3843
Page-3




P-8368/5
Page-6



P-12067
Page-10



P-3843/1
Page-3



P-4390/3
Page-7



P-13878
Page-10



P-8040
Page-4



P-4390/5
Page-7



P-4427

Specifications

2 Ways


Connections:

Main line: 2 wires x 0.75mm

For Cable in rubber

External Diameter (min.-max.):

Main line: 4.8mm - 06mm

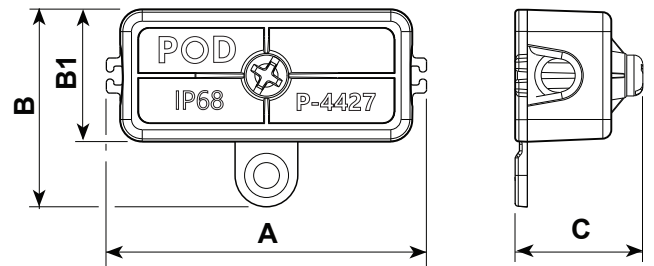

Dimensions(mm)

A	B	B1	C
44	27	18	17.5



P-5537

Specifications

2 Ways


Connections:

Main line: 3 wires x 01mm

For Cable in rubber

External Diameter (min.-max.):

Main line: 05mm - 07mm

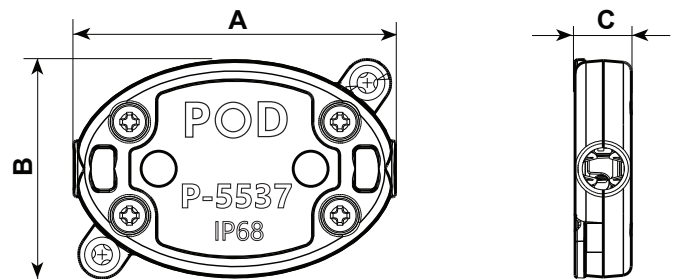

Dimensions(mm)

A	B	C
55	37	10



P-7023

Specifications

2 Ways


Connections:

Main line: 3 wires x 1.5mm

For cable in rubber

External Diameter (min.-max.):

Main line: 5.5mm - 10mm

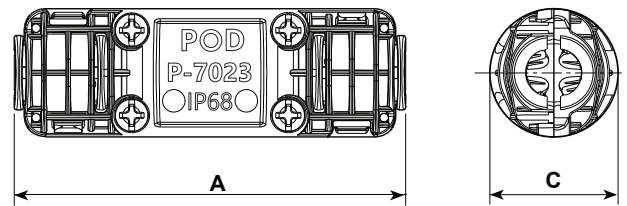

Dimensions(mm)

A	C
70	23



P-3737

Specifications

2 Ways


Connections:

Main line: 2 wires x 01-1.5mm

For Cable in rubber

External Diameter (min.-max.):

Main line: 06mm - 08mm

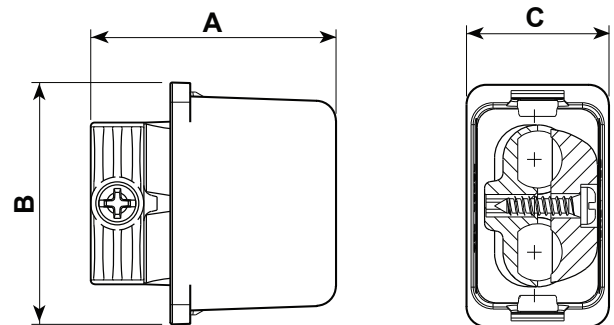

Dimensions(mm)

A	B	C
37	36.5	22



P-3843

Specifications

2 Ways


Connections:

Main line: 3 wires x 1.5mm

For Cable in rubber

External Diameter (min.-max.):

Main line: 08mm - 10mm

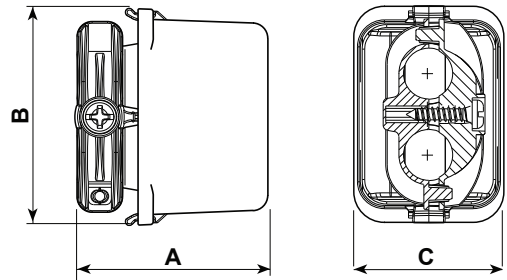

Dimensions(mm)

A	B	C
38	42.5	29.5



P-3843/1

Specifications

2 Ways


Connections:

Main line: 4 wires x 01mm, 6 wires x 0.5mm

For Cable in rubber

External Diameter (min.-max.):

Main line: 08mm - 10mm

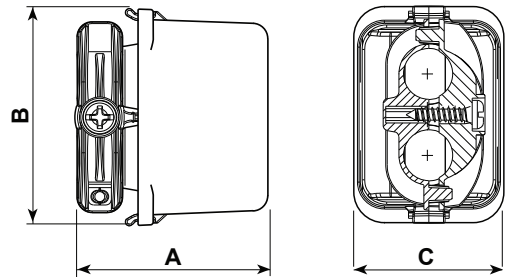

Dimensions(mm)

A	B	C
38	42.5	29.5



P-8040

Specifications

4 Ways

Connections:


Main line: 2 wires x 01mm

Serial Connection

For Cable in rubber

External Diameter (min.-max.):

Main line: 4.5mm - 8.5mm

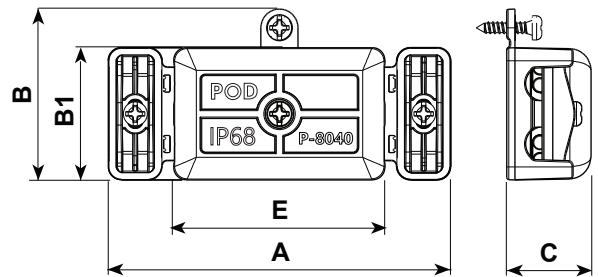

Dimensions(mm)

A	B	B1	C	E
80	39.5	30.5	19.5	50



P-8040/1

Specifications

2 Ways

Connections:


Main line: 2 wires x 01mm

Parallel Connection

For Cable in rubber

External Diameter (min.-max.):

Main line: 4.5mm - 8.5mm

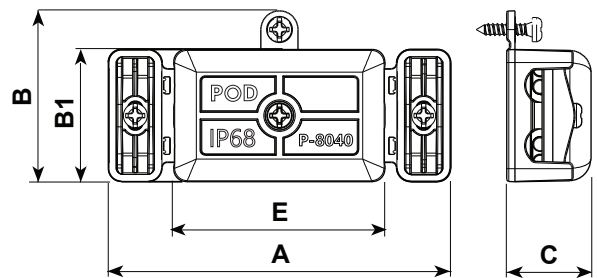

Dimensions(mm)

A	B	B1	C	E
80	39.5	30.5	19.5	50



P-10029

Specifications

2 Ways


Connections:

Main line: 4 wires x 0.1mm, 6 wires x 0.5mm

For Cable in rubber

External Diameter (min.-max.):

Main line: 06mm - 12mm

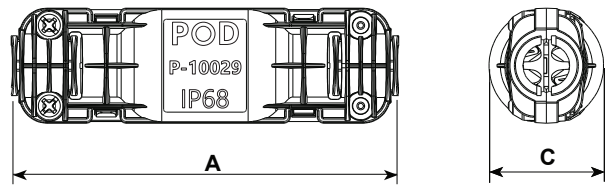

Dimensions(mm)

A	C
100	29



P-10029/3

Specifications

2 Ways


Connections:

Main line: 3 wires x 2.5mm

For Cable in rubber

External Diameter (min.-max.):

Main line: 6.5mm - 12mm

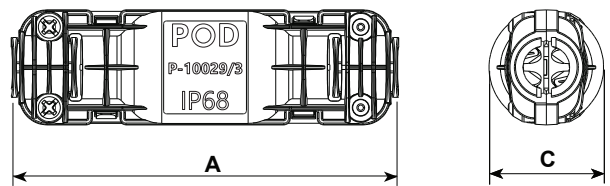

Dimensions(mm)

A	C
100	29



P-8368/3

Specifications

2 Ways

Connections:

Main line: 3 wires x 2.5mm


Derivation line: 3 wires x 1.5mm

For Cable in rubber

External Diameter (min.-max.):

Main line: 6.5mm - 12mm

Derivation line: 5.5mm - 10mm

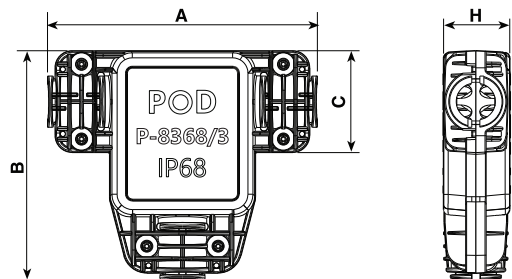

Dimensions(mm)

A	B	C	H
83	68.5	30	19.5



P-8368/5

Specifications

3 Ways

Connections:

Main line: 5 wires x 1.5mm


Derivation line: 5 wires x 0.75mm

For Cable in rubber

External Diameter (min.-max.):

Main line: 6.5mm - 12mm

Derivation line: 5.5mm - 10mm

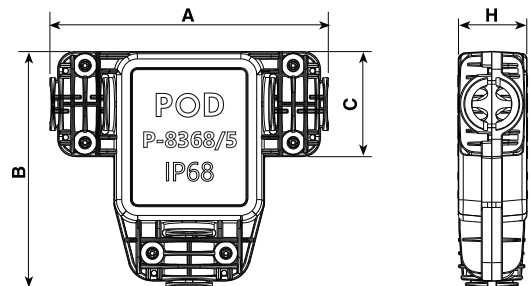

Dimensions(mm)

A	B	C	H
83	68.5	30	30



P-4390/3

Specifications

2 Ways


Connections:

Main line: 3 wires x 2.5mm

For Cable in rubber

External Diameter (min.-max.):

Main line: 6.5mm - 12mm

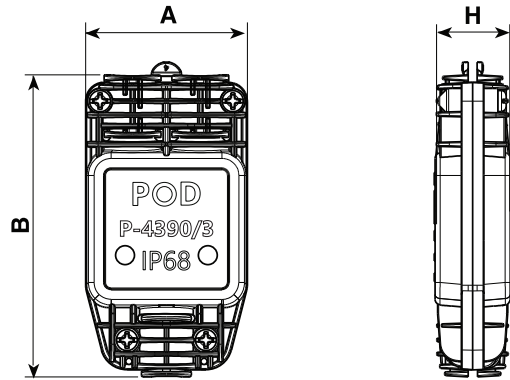

Dimensions(mm)

A	B	H
43	90	20



P-4390/5

Specifications

2 Ways

Connections:


Main line: 5 wires x 1.5mm

(for dimmable and/or DALI system lighting fixture)

For Cable in rubber

External Diameter (min.-max.):

Main line: 6.5mm - 12mm

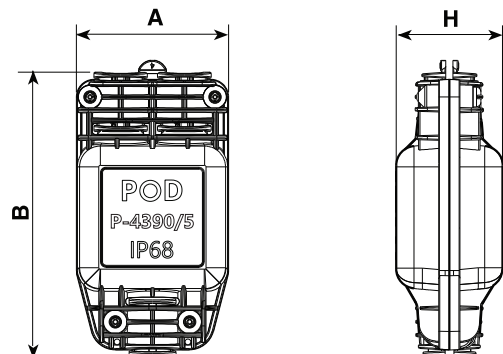

Dimensions(mm)

A	B	H
43	90	30



P-10544

Specifications

4 Ways


Connections:

Main line: 3 wires x 2.5mm

For Cable in rubber

External Diameter (min.-max.):

Main line: 6.5mm - 12mm

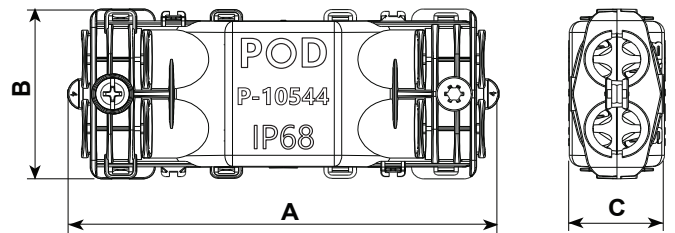

Dimensions(mm)

A	B	C
105	44	24



P-10544/2

Specifications

4 Ways


Connections:

Main line: 4 wires x 1.5mm

For Cable in rubber

External Diameter (min.-max.):

Main line: 6.5mm - 12mm

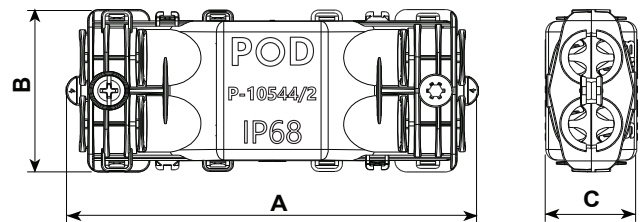

Dimensions(mm)

A	B	C
105	44	24



P-12040/2

Specifications

2 Ways


Connections:

Main line: 2 wires x 06mm

For Cable in rubber

External Diameter (min.-max.):

Main line: 7.5mm - 16mm

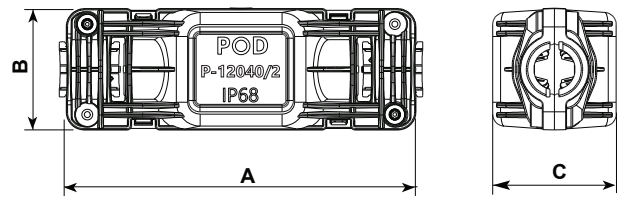

Dimensions(mm)

A	B	C
120	40	41



P-12040/3

Specifications

2 Ways


Connections:

Main line: 3 wires x 04mm

For Cable in rubber

External Diameter (min.-max.):

Main line: 7.5mm - 16mm

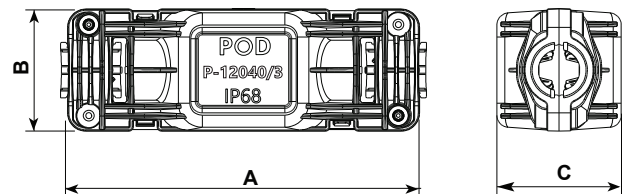

Dimensions(mm)

A	B	C
120	40	41



P-12067

Specifications

3 Ways

Connections:

Main line: 3 wires x 06mm


Derivation line: 3 wires x 2.5mm

For Cable in rubber

External Diameter (min.-max.):

Main line: 7.5mm - 16mm

Derivation line: 6.5mm - 12mm

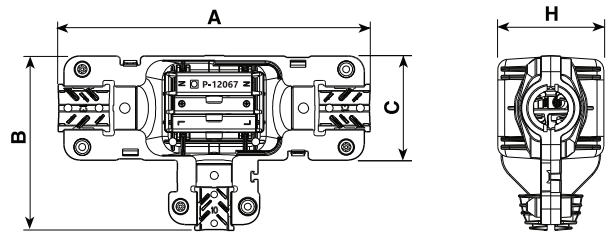

Dimensions(mm)

A	B	C
120	67	37



P-13878

Specifications

4 Ways

Connections:


Main line: 5 wires x 1.5mm

(for dimmable and/or DALI system lighting fixture)

For Cable in rubber

External Diameter (min.-max.):

Main line: 7.5mm - 16mm

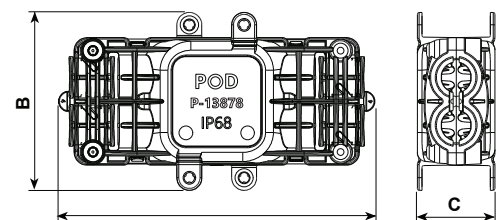

Dimensions(mm)

A	B	C
138	78	35



IP-68 PRE FILLED GEL CONNECTORS

Manufactured by

INNOVATIVE INDIA ILLUMINATIONS



NAWARA

Authorised Distributor for GCC

NAWARA AL-MADON FOR TRADING EST.

Thanitah Bint Al Rabie Street
Josham District, Madina, Madina Province, 42363
Kingdom of Saudi Arabia

Email:

Nawaraalmodon@gmail.com

Contact no:

Sales: +966 559131305 , +966537838445